

General Description

The 3-Axis TMR2309 linear sensor utilizes three unique push-pull Wheatstone bridges. The 3-Axis TMR2309 is available in a 9.5 mm X 9.5 mm X 6.0 mm³ package.

Features and Benefits


- Tunneling Magneto resistance (TMR) Technology
- Ultra High Sensitivity (~100 mV/V/Oe)
- Ultra Low Noise Spectral Density (150 pT/√Hz@1Hz)
- Very Low Power Consumption
- Excellent Thermal Stability
- Low Hysteresis
- Compatible with wide Range of Supply Voltages
- No need for set/reset calibration

Applications

- Weak Magnetic Field Sensing
- Current Sensors
- Position and Displacement Sensing
- Bio-medical Sensing
- Magnetic Communication


Transfer Curve

The following figure shows the response of the 3-axis TMR2309 to an applied magnetic field in the range of ±10Oe and ±10Oe when the TMR2309 is biased at 1V.

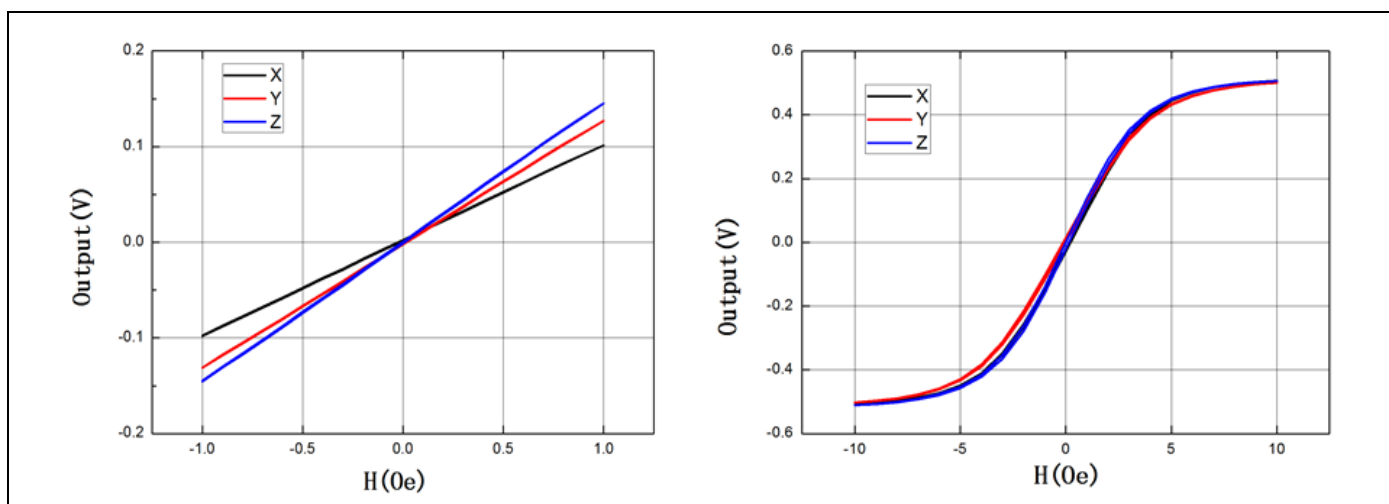

Pin Configuration

(Arrow indicates direction of applied field that generates a positive output voltage after a SET pulse.)

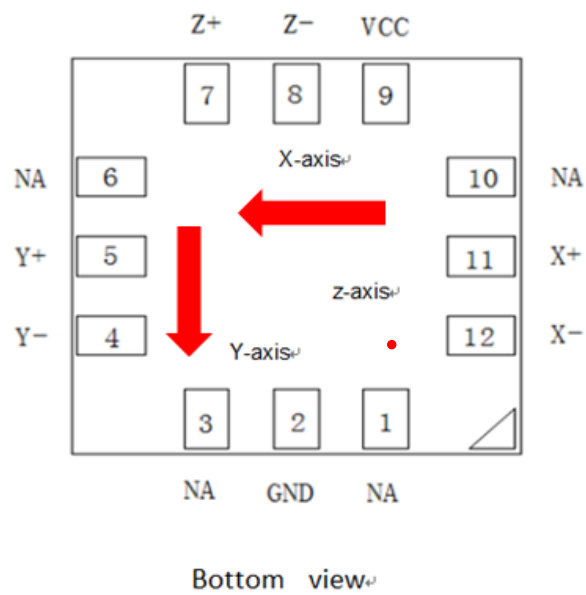

Pin No.	Pin Name	Pin Function
1	VZ-	Analog Z-axis Output-
2	VY-	Analog Y-axis Output-
3	VX-	Analog X-axis Output-
4	GND	Ground
5	VCC	Supply Voltage
6	VX+	Analog X-axis Output+
7	VY+	Analog Y-axis Output+
8	VZ+	Analog Z-axis Output+

Absolute Maximum Ratings

Parameter	Symbol	Limit	Unit
Supply Voltage	V_{CC}	7	V
Reverse Supply Voltage	V_{RCC}	7	V
Max Exposed Field	H_E	4000	Oe ⁽¹⁾
ESD Voltage	V_{ESD}	4000	V
Operating Temperature	T_A	-40~125	°C
Storage Temperature	T_{stg}	-50 ~150	°C

Specification ($V_{CC}=1.0V$, $T_A=25^{\circ}C$, Differential Output)

Parameter	Symbol	Conditions	Min	Typ	Max	Unit
Supply Voltage	V_{CC}	Operating		1	7	V
Supply Current	I_{CC}	Output Open		0.07 ⁽²⁾		mA
Resistance	R			15		KOhm
Sensitivity	SEN	X-axis Fit @ ± 1 Oe		100		mV/V/Oe
		Y-axis Fit @ ± 1 Oe		100		mV/V/Oe
		Z-axis Fit @ ± 1 Oe		100		mV/V/Oe
Saturation Field	H_{sat}	X-axis		± 8		Oe
		Y-axis		± 8		Oe
		Z-axis		± 8		Oe
Non-Linearity	NONL	X-axis Fit @ ± 1 Oe		0.5		%FS
		Y-axis Fit @ ± 1 Oe		0.5		%FS
		Y-axis Fit @ ± 1 Oe		0.5		%FS
Offset Voltage	V_{offset}	X-axis	-15		15	mV/V
		Y-axis	-15		15	mV/V
		Z-axis	-15		15	mV/V
Hysteresis	Hys	X-axis Fit @ ± 1 Oe			0.02	Oe
		Y-axis Fit @ ± 1 Oe			0.02	Oe
		Z-axis Fit @ ± 1 Oe			0.02	Oe
Temperature Coefficient of Resistance	TCR	H = 0 Oe		-600		PPM/ $^{\circ}C$
Temperature Coefficient of Sensitive	TCS			-300		PPM/ $^{\circ}C$
Self Noise	Ni	X-axis @1Hz		150		pT/ $\sqrt{Hz}$
		Y-axis @1Hz		150		pT/ $\sqrt{Hz}$
		Z-axis @1Hz		150		pT/ $\sqrt{Hz}$



Notes:

(1) 1 Oe (Oersted) = 1 Gauss in air = 0.1 millitesla = 79.8 A/m.

(2) Custom resistance may be available upon request.

Package Information

Size: Length x Width x Height = 9.5x9.5x6.0 mm³

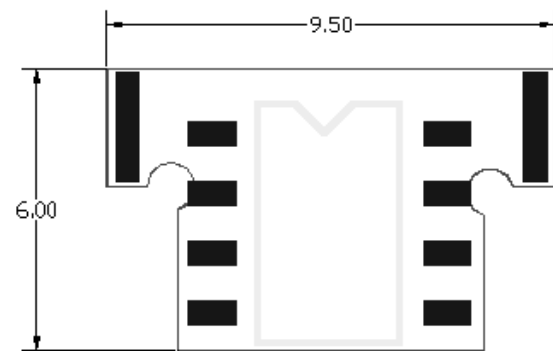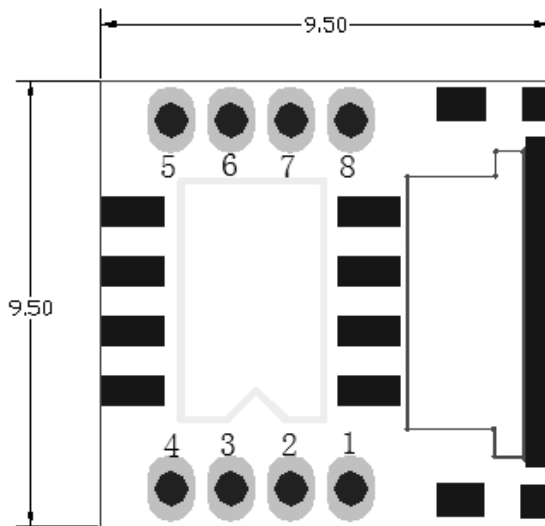



MultiDimension Technology Co., Ltd.

Address: No. 7 Guangdong Road, Zhangjiagang Free Trade Zone, Jiangsu, 215634, China

Web: www.dowaytech.com/en

Email: info@dowaytech.com

The information provided herein by MultiDimension Technology Co., Ltd. (hereinafter MultiDimension) is believed to be accurate and reliable. Publication neither conveys nor implies any license under patent or other industrial or intellectual property rights. MultiDimension reserves the right to make changes to product specifications for the purpose of improving product quality, reliability, and functionality. MultiDimension does not assume any liability arising out of the application and use of its products. MultiDimension's customers using or selling this product for use in appliances, devices, or systems where malfunction can reasonably be expected to result in personal injury do so at their own risk and agree to fully indemnify MultiDimension for any damages resulting from such applications.