

AMR3008

Dual Axis AMR Magnetic Angle Sensor

Description

The AMR3008 is a magnetic angle sensor based on anisotropic magnetoresistance (AMR) technology. It senses the magnetic field parallel to the surface of the sensor with the range of magnetic field rotation angle θ from 0° to 180° , and outputs voltage proportional to the sine or cosine of 2θ .

The AMR3008 adopts two push-pull Wheatstone bridges design, and each bridge contains four high-sensitivity AMR sensing elements to provide output signal as large as 1.3% of the supply voltage. Additionally, this unique AMR Wheatstone bridge design effectively compensates the output against changes in ambient temperature.

It is available in LGA8L (5 mm x 5 mm x 0.9 mm) and DFN6L (2 mm x 3 mm x 0.75 mm) packages.

Features and Benefits

- Anisotropic magnetoresistance (AMR) technology
- Wide range supply voltages
- Large air gap tolerance
- Very low hysteresis
- Excellent temperature stability
- RoHS & REACH compliant

Applications

- Rotary position sensing
- Rotary encoder
- Non-contact potentiometer
- Valve position sensor
- Dial sensor



LGA8L

DFN6L

Selection Guide

Part Number	Angle Range	Supply Voltage	Bridge Resistance	Operating Temperature	Package	Packing Form
AMR3008G	0 to 180°	5 V	2100 Ω	-40°C to 125°C	LGA8L	Tape & Reel
AMR3008D	0 to 180°	5 V	2100 Ω	-40°C to 125°C	DFN6L	Tape & Reel

Catalogue

1. Operating principle	03
2. Pin Configuration	04
3. Absolute Maximum Ratings	05
4. Electrical Specifications	05
5. Dimensions	06

1. Operating principle

The AMR3008 angle sensors use dual Wheatstone bridges comprised of eight high sensitivity AMR sensing elements to increase the sensor's output signal amplitude with enhanced temperature characteristics and anti-interference performance as shown in Figure 1. The X axis outputs are defined as V_{x+} and V_{x-} . The X axis output voltage is found by $V_x = (V_{x+}) - (V_{x-})$. The Y axis outputs are defined as V_{y+} and V_{y-} . The Y axis output voltage is found by $V_y = (V_{y+}) - (V_{y-})$. $V_x = A \sin(2\theta)$ and $V_y = B \cos(2\theta)$ when the magnetic field is at angle θ , where A and B are constants. The angle θ can thus be determined through arctangent function.

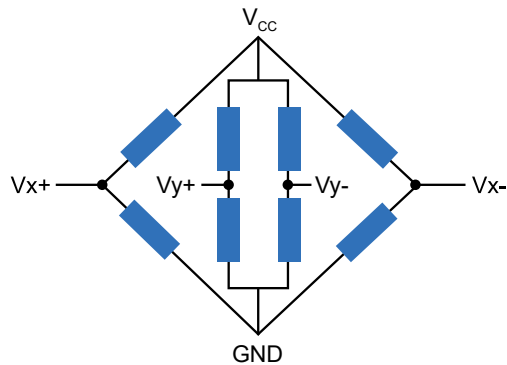


Figure 1. AMR3008 block diagram

By rotating a small magnet placed on top of AMR3008, a rotating magnetic field parallel to the surface of the magnetic is generated and is at the same angle as the magnet. Figure 2 shows the typical output signals of the AMR3008 in response to a rotating field. In Figure 2, the rotating magnetic field is generated by a Helmholtz coil and the supply voltage is 1V.

As seen in Figure 2, the period of the AMR3008 is 180° and V_x and V_y have a phase shift of 45° . Figure 2 also illustrates the definition of peak voltage V_{PEAK} . The output voltage may not be zero at 0° due to the process tolerance, and this V_{OFFSET} can be calculated by equations 1 and 2. Figure 3 illustrates the definition of the magnetic field angle.

$$\text{Equation (1)} \quad V_{PEAK} = \frac{V_{MAX} - V_{MIN}}{2}$$

$$\text{Equation (2)} \quad V_{OFFSET} = \frac{V_{MAX} + V_{MIN}}{2}$$

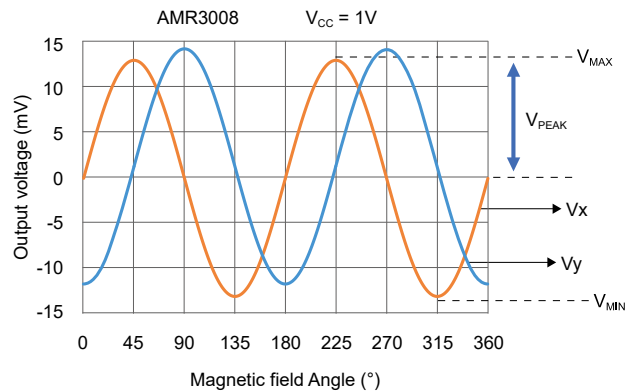


Figure 2. Typical AMR3008 output curve

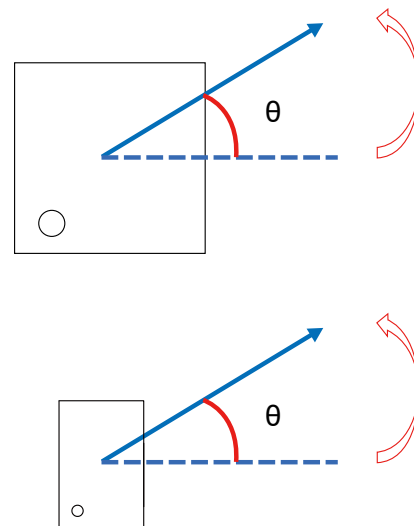


Figure 3. Definition of measured magnetic field angle (top view)

2. Pin Configuration

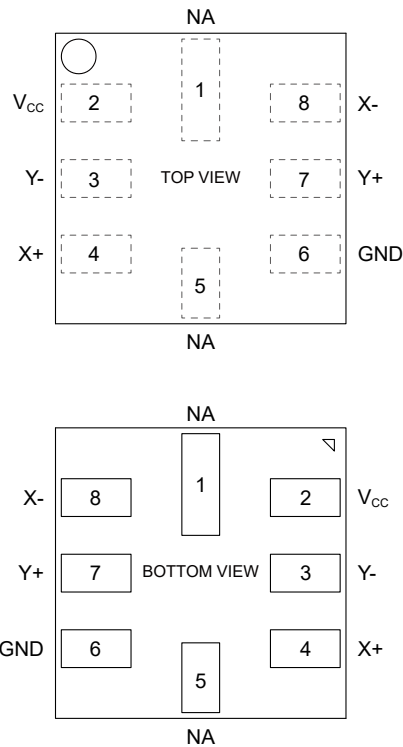


Figure 4. AMR3008G pin configuration (LGA8L)

Number	Name	Function
1	NA	N/A
2	V _{CC}	Supply voltage
3	Y-	Analog differential output 2 (Y axis)
4	X+	Analog differential output 1 (X axis)
5	NA	N/A
6	GND	Ground
7	Y+	Analog differential output 1 (Y axis)
8	X-	Analog differential output 2 (X axis)

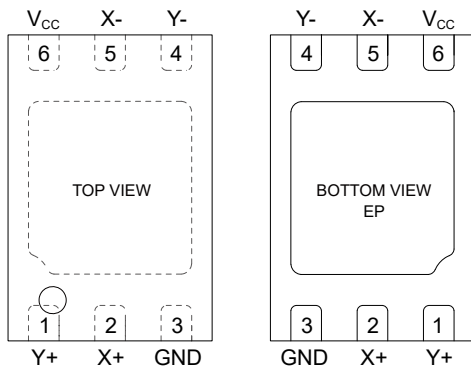


Figure 5. AMR3008D pin configuration (DFN6L)

Number	Name	Function
1	Y+	Analog differential output 1 (Y axis)
2	X+	Analog differential output 1 (X axis)
3	GND	Ground
4	Y-	Analog differential output 2 (Y axis)
5	X-	Analog differential output 2 (X axis)
6	V _{CC}	Supply voltage
EP	NC	N/A

3. Absolute Maximum Ratings

Parameters	Symbol	Condition	Min.	Max.	Unit
Supply voltage	V_{CC}	$T_A = 25\text{ }^{\circ}\text{C}$	-	19	V
Operating ambient temperature	T_A	-	-40	125	$^{\circ}\text{C}$
Storage ambient temperature	T_{STG}	-	-40	150	$^{\circ}\text{C}$

4. Electrical Specifications

$V_{CC} = 5\text{ V}$, $T_A = 25\text{ }^{\circ}\text{C}$, unless specified otherwise

Parameter	Symbol	Condition	Min.	Typ.	Max.	Unit
Supply voltage	V_{CC}	Operating	-	5	18	V
Bridge resistance	R_B	Resistance between V_{CC} and GND; $B = 0\text{ Gs}$, Room temperature	-	2100	-	Ω
Magnetic field angle range	θ_{range}	-	0	-	180	$^{\circ}$
Peak voltage	V_{PEAK}	$V_{CC} = 1\text{ V}$, $B = 800\text{ Gs}$, Room temperature	-	13	-	mV/V
Offset voltage	V_{OFFSET}	$V_{CC} = 1\text{ V}$, $B = 800\text{ Gs}$, Room temperature	-2	-	2	mV/V
Angular error	$\Delta\theta$	Operating	-	0.1	-	$^{\circ}$
Operation coefficient of bridge resistance	TCR_B	$T_A = -40\text{ }^{\circ}\text{C}$ to $125\text{ }^{\circ}\text{C}$	-	2500	-	PPM/ $^{\circ}\text{C}$
Operation coefficient of peak voltage	TCV_{PEAK}	$T_A = -40\text{ }^{\circ}\text{C}$ to $125\text{ }^{\circ}\text{C}$	-	-4250	-	PPM/ $^{\circ}\text{C}$
Operation coefficient of offset voltage	TCV_{OFF}	$T_A = -40\text{ }^{\circ}\text{C}$ to $125\text{ }^{\circ}\text{C}$	-	40	-	$\mu\text{V/V}/^{\circ}\text{C}$

5. Dimensions

LGA8L Package

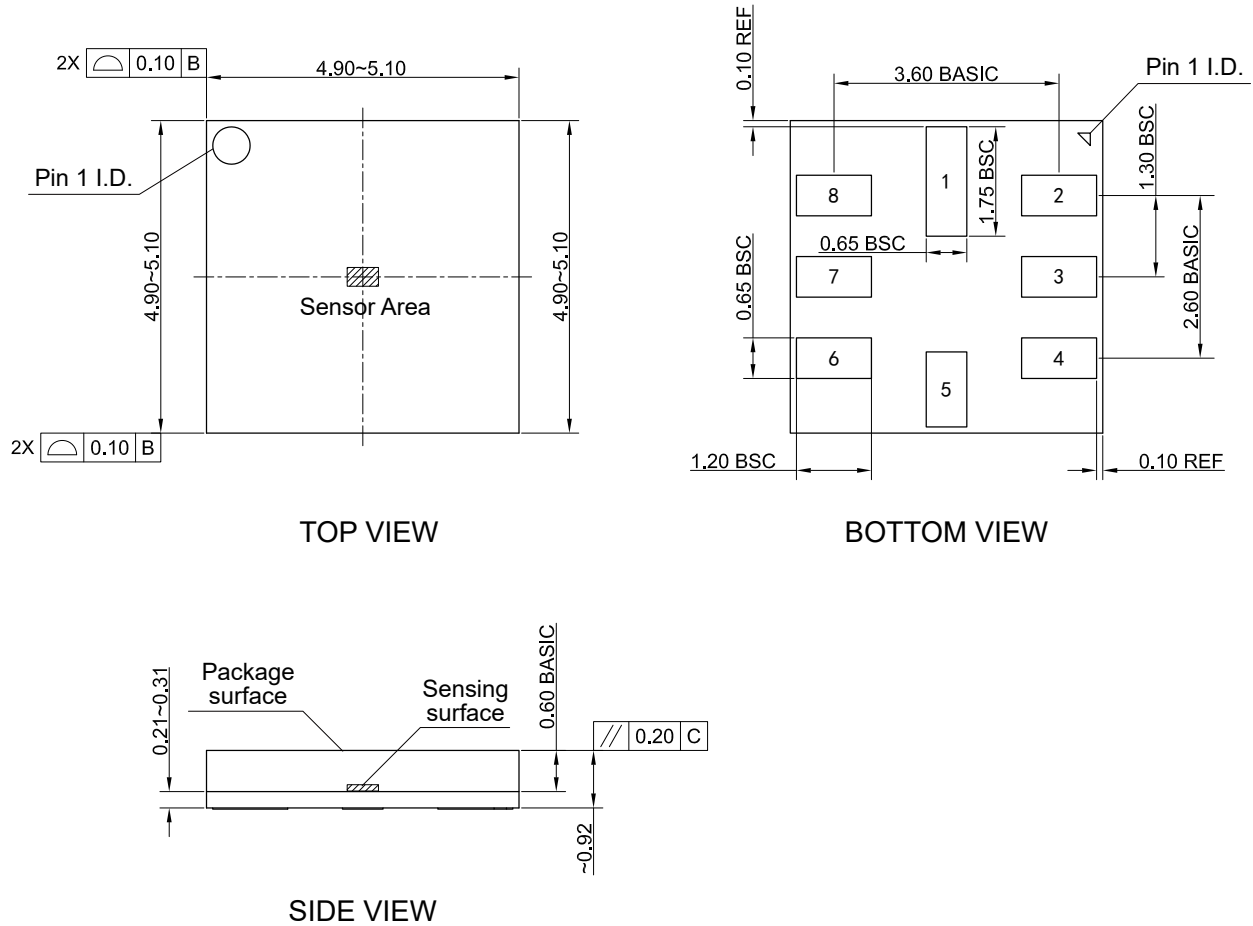


Figure 6. Package outline of LGA8L (unit: mm)

DFN6L Package

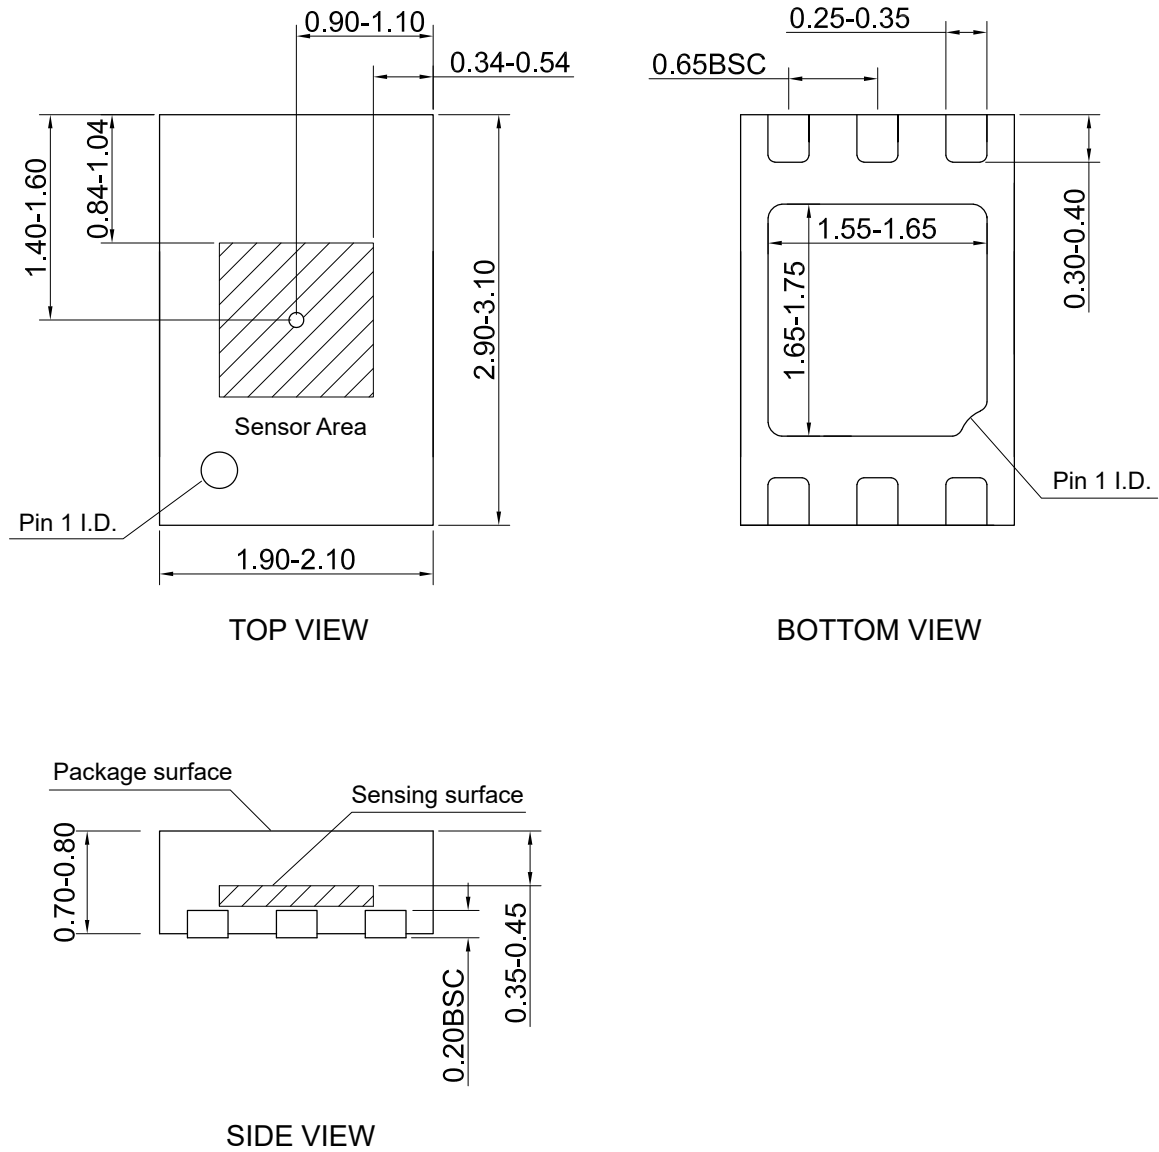


Figure 7. Package outline of DFN6L (unit: mm)

Information furnished herein by MultiDimension Technology Co., Ltd. (hereinafter MDT) is believed to be accurate and reliable. However, MDT disclaims any and all warranties and liabilities of any kind, with respect to any examples, hints or any performance or use of technical data as described herein and/or any information regarding the application of the product, including without limitation warranties of non-infringement of intellectual property rights of any third party. This document neither conveys nor implies any license under patent or other industrial or intellectual property rights. Customer or any third-party must further determine the suitability of the MDT products for its applications to avoid the applications default of customer or third-party. MDT accept no liability in this respect.

MDT does not assume any liabilities of any indirect, incidental, punitive, special or consequential damages (including without limitation of lost profits, lost savings, business interruption, costs related to the removal or replacement of any products or rework charges) whether or not such damages are based on tort (including negligence), warranty, breach of contract or any other legal theory. Notwithstanding any damages that customer might incur for any reason whatsoever, MDT's aggregate and cumulative liability towards customer for the products described herein shall be limited in accordance with the terms and conditions of commercial sale of MDT.

Absolute maximum ratings are the extreme limits the device will withstand without damage to the MDT product. However, the electrical and mechanical characteristics are not guaranteed as the maximum limits (above recommended operating conditions) are approached. MDT disclaims any and all warranties and liabilities of the MDT product will operate at absolute maximum ratings.

Specifications may change without notice.

Please download latest document from our official website www.dowaytech.com/en.

Recycling

The product(s) in this document need to be handed over to a qualified solid waste management services company for recycling in accordance with relevant regulations on waste classification after the end of the product(s) life.

