



TMR3015

High Accuracy Analog TMR Angle Sensor

Description

TMR3015 contains a push-pull Wheatstone bridge, which is composed of four high-sensitivity tunneling magnetoresistance (TMR) elements. The sensor outputs a sinusoidal signal, and the period of the signal is that the direction of the magnetic field rotates 360° in the sensing plane.

TMR3015 is available in three compact SOT23-5, DFN4L (0.8 mm × 0.4 mm × 0.23 mm) and DFN4L (1.6 mm × 1.6 mm × 0.5 mm) packages for easy assembly in small spaces.

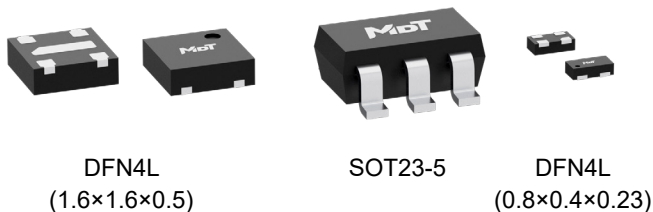


Features and Benefits

- Tunneling magnetoresistance (TMR) technology
- Wide range supply voltage
- Analog differential output
- Excellent temperature stability
- Adapt to large air gap
- Compact DFN package
- RoHS and REACH compliant

Applications

- Absolute rotation angle detection in mobile devices
- Detection of the rotation angle of robot arms and motors
- Location detection of other consumer products

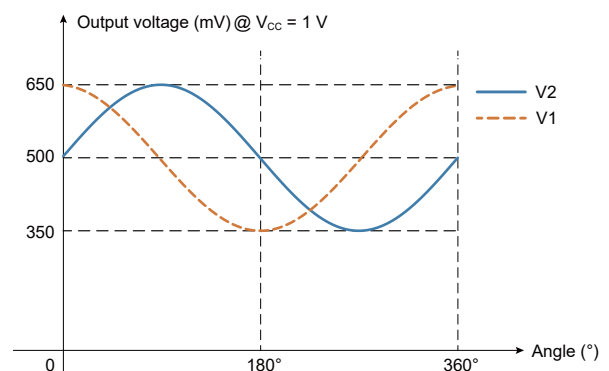

Selection Guide

Part Number	Output	Supply Voltage	Operating Temperature	Package	Packing Form
TMR3015D	Analog	3 V to 5.5 V	-40 °C to 85°C	DFN4L (0.8×0.4×0.23)	Tape & Reel
TMR3015F	Analog	3 V to 5.5 V	-40 °C to 85°C	DFN4L (1.6×1.6×0.5)	Tape & Reel
TMR3015S	Analog	3 V to 5.5 V	-40 °C to 85°C	SOT23-5	Tape & Reel

Catalogue

1. Functional Block Diagram.....	03
2. Pin Configuration	03
3. Absolute Maximum Ratings	04
4. Electrical Specifications.....	04
5. Magnetic Specifications.....	04
6. Specification Definitions	05
7. Applications	06
8. Dimensions.....	08
9. Recommended PCB Pad Sizes.....	10

1. Functional Block Diagram

TMR3015 TMR angle sensor integrates a Wheatstone bridge using TMR elements to increase the output amplitude and improve the temperature characteristics.

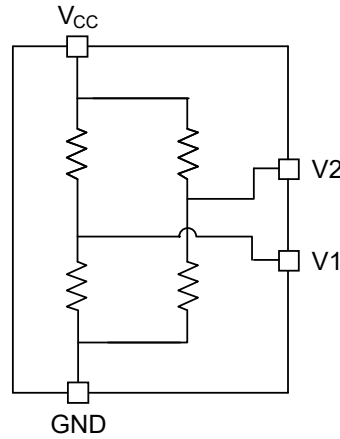


Figure 1. Block diagram

2. Pin Configuration

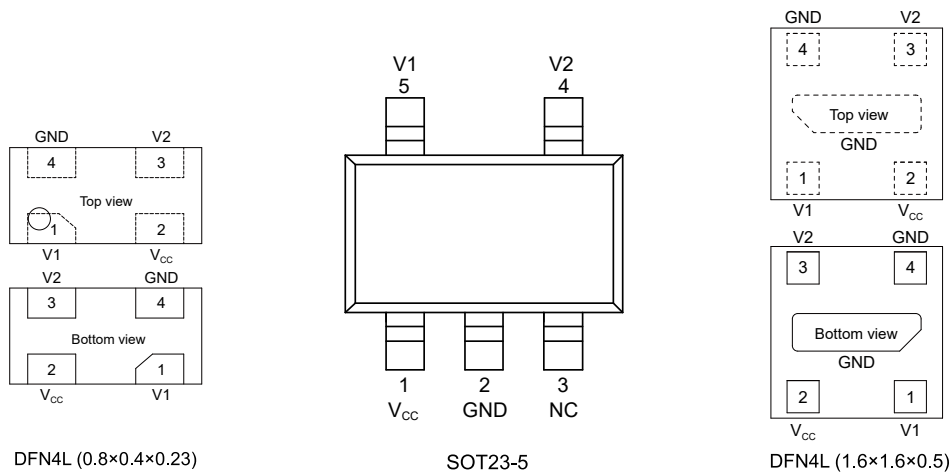


Figure 2. Pin configuration

Number			Name	Function
DFN4L (0.8x0.4)	DFN4L (1.6x1.6)	SOT23-5		
1	1	5	V1	Output signal 1
2	2	1	V _{CC}	Power supply
3	3	4	V2	Output signal 2
4	4, 5	2	GND	GND
-	-	3	NC	NC

3. Absolute Maximum Ratings

Parameters	Symbol	Min.	Max.	Unit
Supply voltage	V_{CC}	-	6	V
Magnetic flux density	B	-	3000	Gs
ESD performance (HBM)	$V_{ESD(HBM)}$	-	3000	V
ESD performance (CDM)	$V_{ESD(CDM)}$	-	2000	V
Operating ambient temperature	T_A	-40	85	°C
Storage ambient temperature	T_{STG}	-40	125	°C

Note: The absolute maximum rating only lists the conditions under which the sensors are not permanently damaged. For normal operations please refer to Specifications.

4. Electrical Specifications

$V_{CC} = 3.0\text{ V}$, $T_A = 25\text{ °C}$

Parameter	Symbol	Condition	Min.	Typ.	Max.	Unit
Supply voltage	V_{CC}	Operating	3	-	5.5	V
Bridge resistance	R_B	B = 300 Gs	4	-	10	kΩ
Peak voltage	V_{PP1}, V_{PP2}	B = 300 Gs	200	300	400	mV/V
Midpoint voltage	V_{Mid}	B = 300 Gs	450	500	550	mV/V
Offset voltage	V_{OFFSET}	B = 300 Gs	-15	0	15	mV/V
Temperature coefficient of bridge resistance	TCR_B	B = 300 Gs, -30°C to 85°C	-	-0.05	-	%/°C
Temperature coefficient of amplitude	TCV_{PEAK}	B = 300 Gs, -30°C to 85°C	-	-0.13	-	%/°C

5. Magnetic Specifications

Parameter	Symbol	Condition	Min.	Typ.	Max.	Unit
Magnetic flux density	B	-	200	-	800	Gs

Note: 1 Gauss in air = 0.1 millitesla = 79.8 A/m

6. Specification Definitions

6.1 Bridge resistance R_B

Resistance between pin V_{CC} and GND

6.2 Output amplitude V_{PEAK}

$$V_{PEAK1} = \frac{V_{MAX1} - V_{MIN1}}{2} \quad V_{PP1} = V_{MAX1} - V_{MIN1}$$

$$V_{PEAK2} = \frac{V_{MAX2} - V_{MIN2}}{2} \quad V_{PP2} = V_{MAX2} - V_{MIN2}$$

6.3 Midpoint voltage V_{Mid}

$$V_{Mid1} = \frac{V_{MAX1} + V_{MIN1}}{2}$$

$$V_{Mid2} = \frac{V_{MAX2} + V_{MIN2}}{2}$$

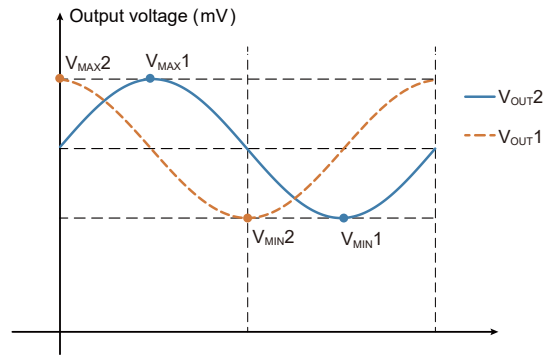


Figure 3. Definition of V_{MIN} and V_{MAX} in output signal

6.4 Offset V_{OFFSET}

$$V_{OFFSET} = V_{Mid1} - V_{Mid2}$$

6.5 Temperature coefficient of bridge resistance TCR_B

R_H : High temperature resistance R_L : Low temperature resistance R_N : Resistance at 25°C

T_H : High temperature T_L : Low temperature T_N : 25°C

$$TCR_B = \frac{R_H - R_L}{R_N (T_H - T_L)} \times 100\%$$

6.6 Temperature coefficient of amplitude TCV_{PEAK}

V_{PEAKH1} : V_{OUT1} in high temp V_{PEAKL1} : V_{OUT1} in low temp V_{PEAKN1} : V_{OUT1} at 25°C

V_{PEAKH2} : V_{OUT2} in high temp V_{PEAKL2} : V_{OUT2} in low temp V_{PEAKN2} : V_{OUT2} at 25°C

T_H : High temperature T_L : Low temperature T_N : 25°C

$$TCV_{PEAK1} = \frac{V_{PEAKH1} - V_{PEAKL1}}{V_{PEAKN1} (T_H - T_L)} \times 100\% \quad TCV_{PEAK2} = \frac{V_{PEAKH2} - V_{PEAKL2}}{V_{PEAKN2} (T_H - T_L)} \times 100\%$$

7. Applications

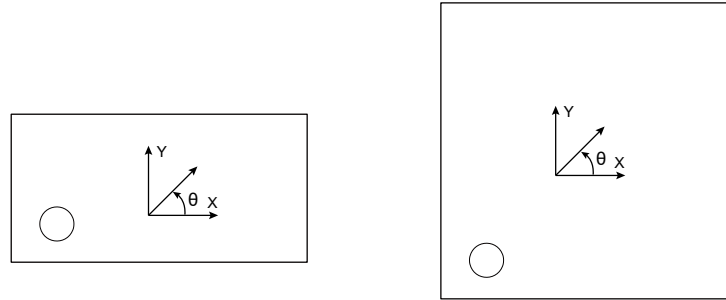


Figure 4-1. Sensing direction (DFN4L)

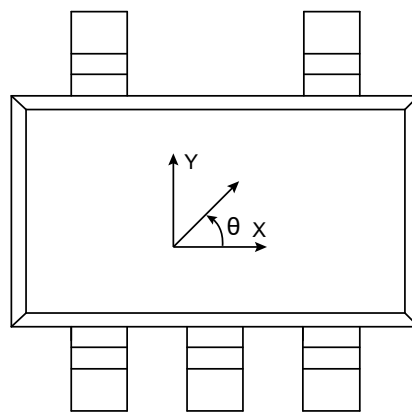


Figure 4-2. Sensing direction (SOT23-5)

The sensing direction is parallel to the X-Y plane where package laser mark is located as shown in Figure 4. When the sensor is in an appropriate magnetic field, the resistance value of each TMR element of the sensor changes due to the difference between the sensitive direction of each TMR element and the direction of the magnetic field, resulting in a corresponding change in the output voltage.

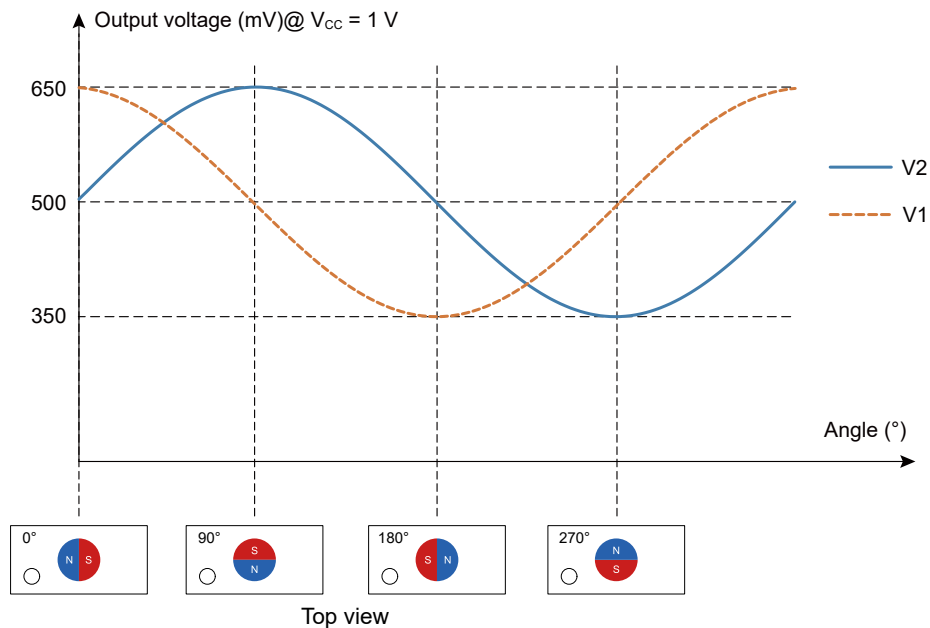


Figure 5-1. Single-ended output of TMR3015D in one period @ $V_{CC} = 1\text{ V}$

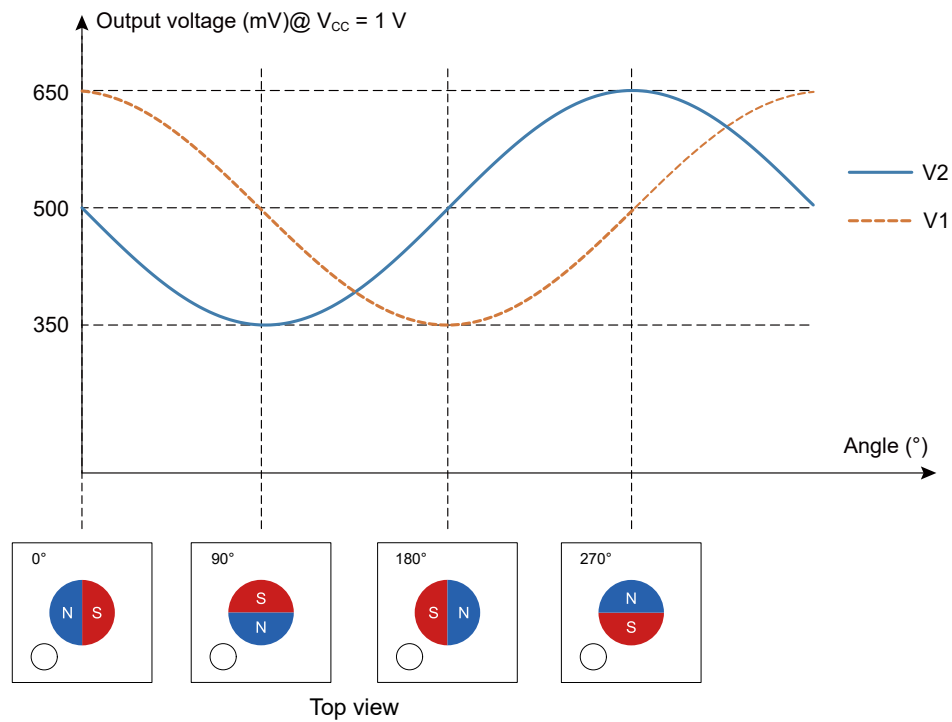


Figure 5-2. Single-ended output of TMR3015F in one period @ $V_{CC} = 1\text{ V}$

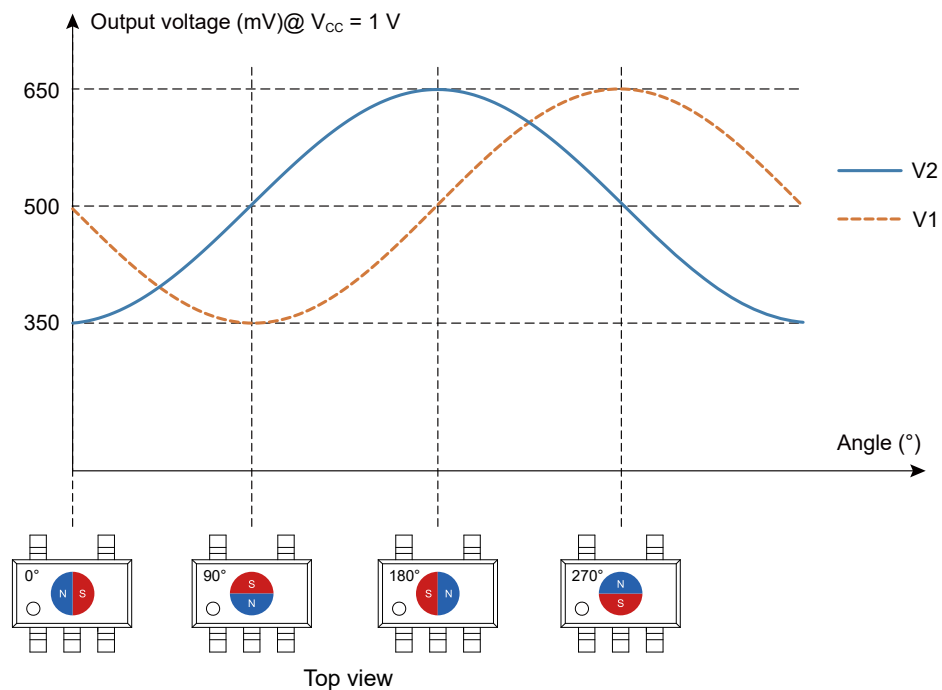


Figure 5-3. Single-ended output of TMR3015S in one period @ $V_{CC} = 1\text{ V}$

8. Dimensions

DFN4L (0.8×0.4×0.23) Package

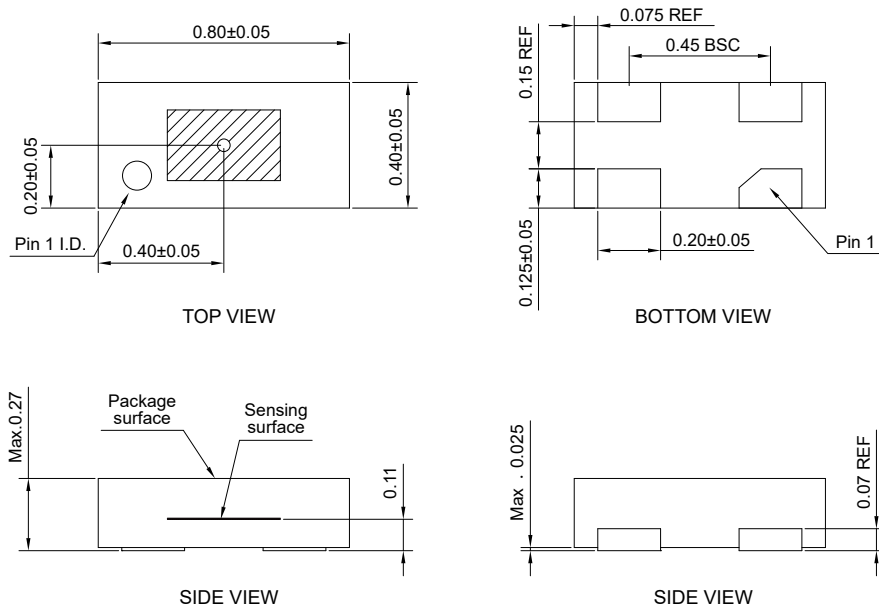


Figure 6. Package outline of DFN4L(0.8×0.4×0.23) (unit: mm)

DFN4L (1.6×1.6×0.5) Package

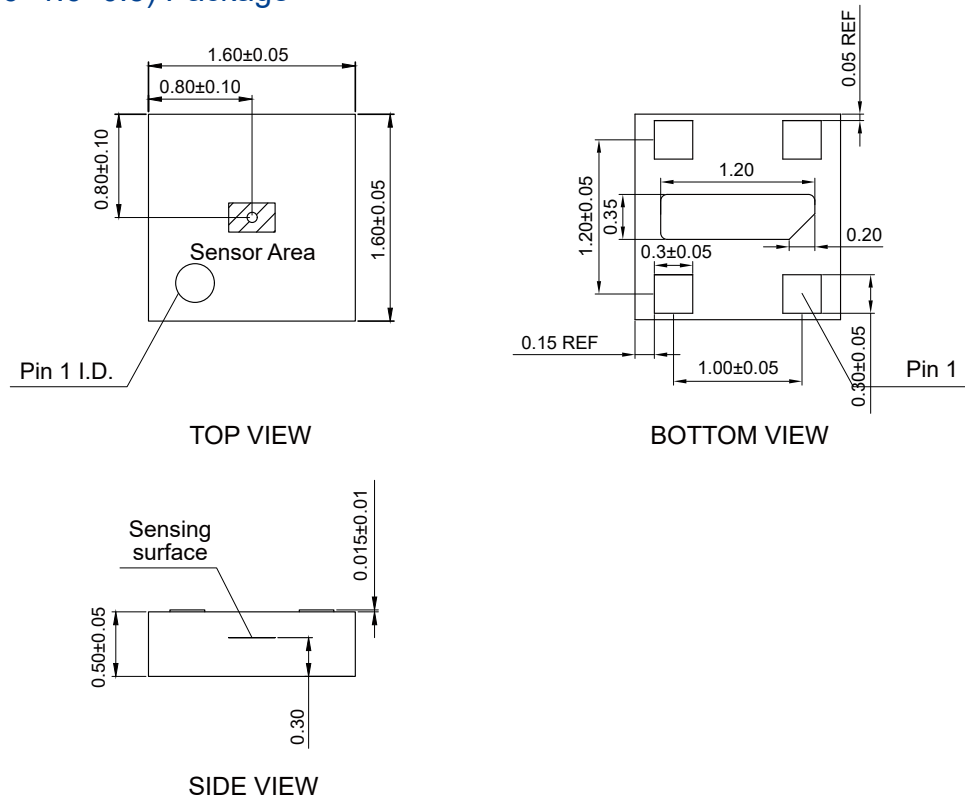


Figure 7. Package outline of DFN4L(1.6×1.6×0.5) (unit: mm)

SOT23-5 Package

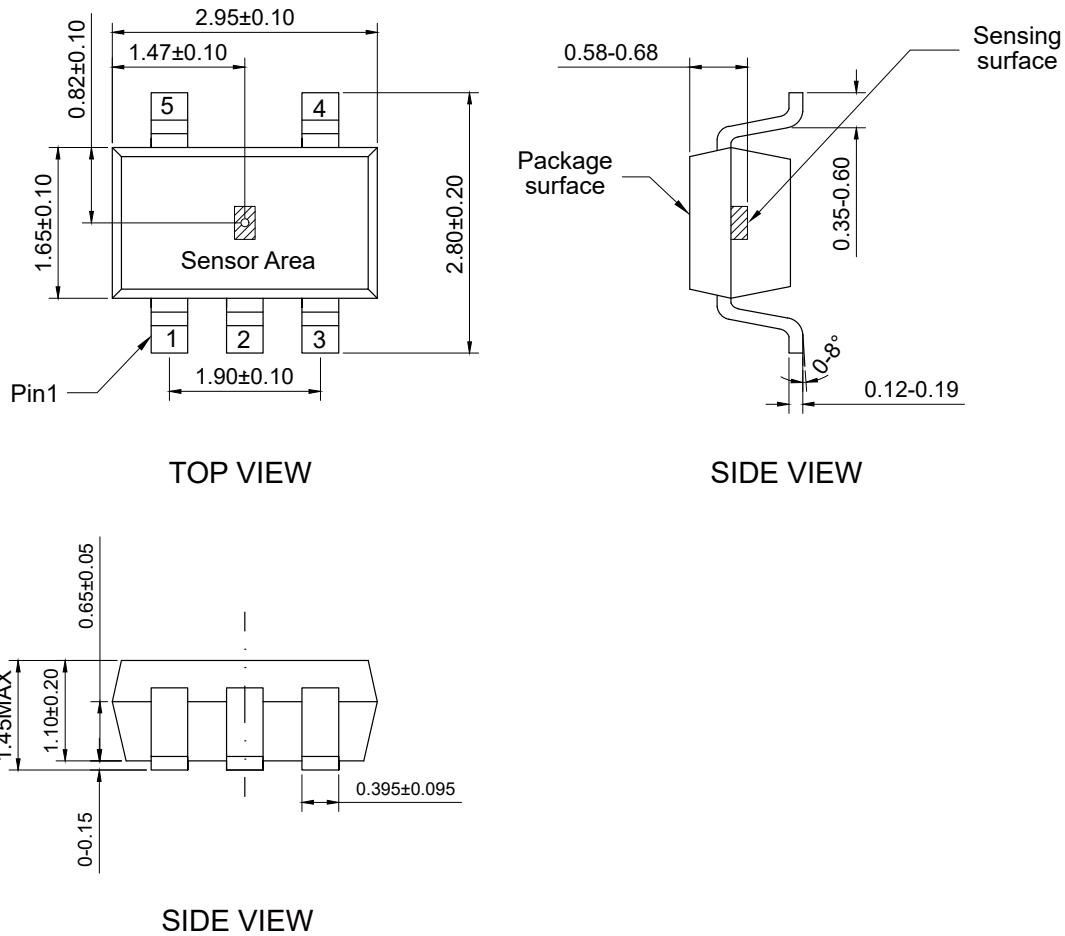


Figure 8. Package outline of SOT23-5 (unit: mm)


Product Marking Description

“Y” represents the year of material input, with one character for every half year, and 26 characters covering 13 years;

“W” represents the week of material input, with 26 letters representing 26 weeks;

“L” represents the batch of material input, with one character for each wafer per input;

“PN” represents the part number.

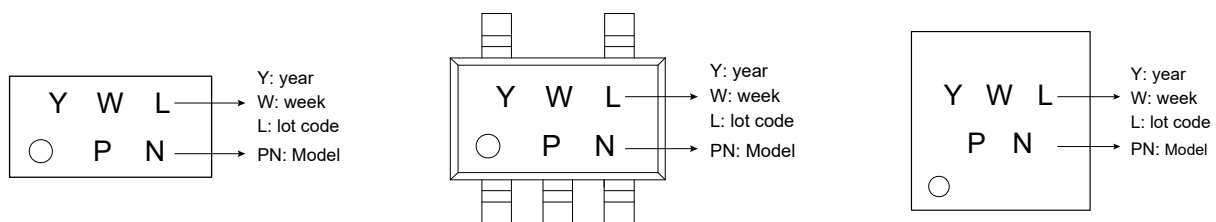

9. Recommended PCB Pad Sizes

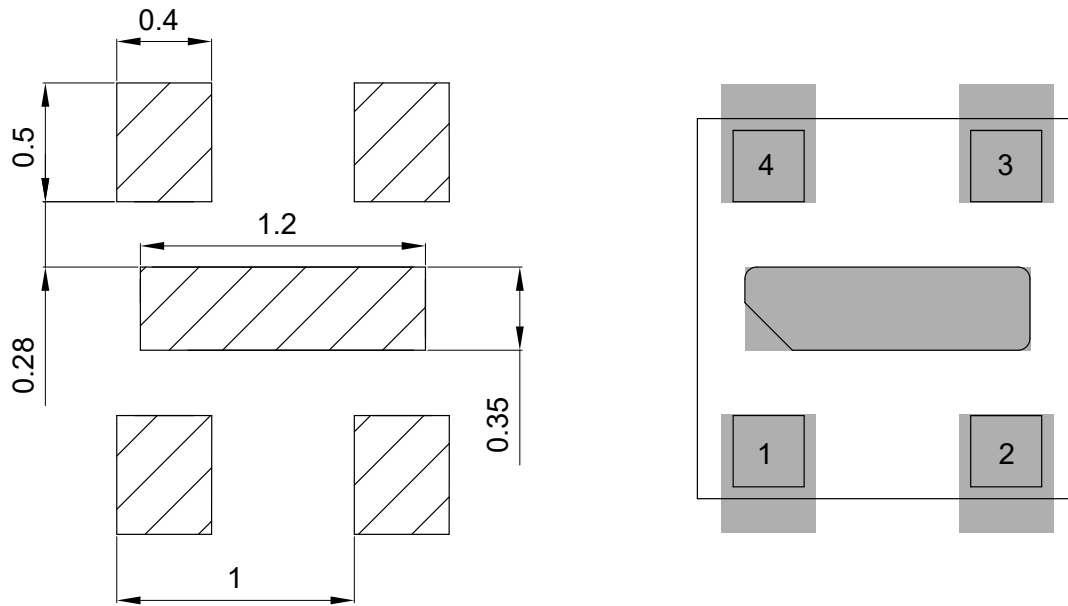


Figure 9. Recommended pad size diagram of DFN4L(1.6×1.6×0.5) (unit: mm)

The Pattern is just reference, Please do soldering study well when you design PCB

It is recommended to follow the thrust $\geq 1\text{kgf}$

Recommended solder paste type 4# or 5# SAC305 (Sn-3.0Ag-0.5Cu)

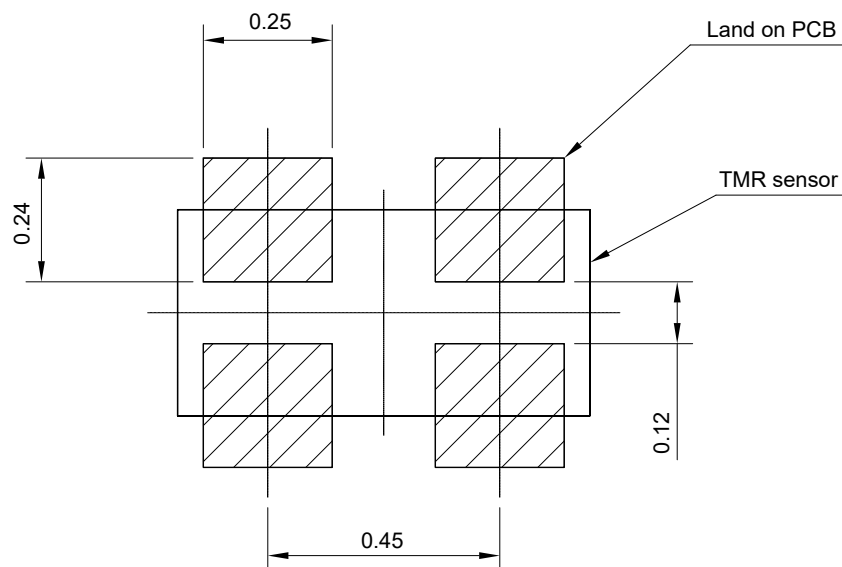


Figure 10. Recommended pad size diagram of DFN4L(0.8×0.4×0.23) (unit: mm)

Information furnished herein by MultiDimension Technology Co., Ltd. (hereinafter MDT) is believed to be accurate and reliable. However, MDT disclaims any and all warranties and liabilities of any kind, with respect to any examples, hints or any performance or use of technical data as described herein and/or any information regarding the application of the product, including without limitation warranties of non-infringement of intellectual property rights of any third party. This document neither conveys nor implies any license under patent or other industrial or intellectual property rights. Customer or any third-party must further determine the suitability of the MDT products for its applications to avoid the applications default of customer or third-party. MDT accept no liability in this respect.

MDT does not assume any liabilities of any indirect, incidental, punitive, special or consequential damages (including without limitation of lost profits, lost savings, business interruption, costs related to the removal or replacement of any products or rework charges) whether or not such damages are based on tort (including negligence), warranty, breach of contract or any other legal theory. Notwithstanding any damages that customer might incur for any reason whatsoever, MDT's aggregate and cumulative liability towards customer for the products described herein shall be limited in accordance with the terms and conditions of commercial sale of MDT.

Absolute maximum ratings are the extreme limits the device will withstand without damage to the MDT product. However, the electrical and mechanical characteristics are not guaranteed as the maximum limits (above recommended operating conditions) are approached. MDT disclaims any and all warranties and liabilities of the MDT product will operate at absolute maximum ratings.

Specifications may change without notice.

Please download latest document from our official website www.dowaytech.com/en.

Recycling

The product(s) in this document should be disposed of at the end of the product(s) life using a qualified waste management company for recycling in accordance with local regulations.

