TMR7559-B

Board Mount Precision Current Sensor

Description

TMR7559-B is a close loop current sensor for accurate measurement of DC, AC, pulsed current and arbitrary waveform current with galvanic isolation between primary and secondary circuits.



Features and Benefits

- High accuracy
- Excellent linearity
- Low temperature coefficient
- Fast response time
- Galvanic isolation
- RoHS & REACH compliant

Applications

- Solar inverter
- Direct-current dynamo
- Uninterruptible power supplies (UPS)
- Switched model power supplies (SMPS)
- Variable frequency drive (VFD)

Selection Guide

Part Number	Primary Nominal Current	Primary Current Measuring Range
TMR7559-1000B	100 A	±300 A
TMR7559-1500B	150 A	±450 A
TMR7559-2000B	200 A	±500 A
TMR7559-2500B	250 A	±500 A

Insulation and Environmental Characteristics

Parameters	Symbol	Typ.	Unit
Dielectric Strength	V_D	4	kV(50 Hz, 1 min)
Insulation Resistance	R_{IS}	1000	MΩ
Creepage Distance	d_{CP}	22	mm
Clearance	d_{CL}	14.5	mm
Ambient Operating Temperature	T_A	-40 to +105	°C
Ambient Storage Temperature	T_{STG}	-50 to +105	°C
Mass	m	60	g

Catalogue

1. Specifications 03
2. Maximum Continuous DC Primary Current 04
3. Typical Output Characteristics 05
4. Typical Temperature Characteristics 06
5. Parameters Definition and Formula 07
6. Electrical Connection Diagram 08
7. Dimensions 09
8. Recommended Pad Schematic Diagram 10
9. Typical Application Circuit 10

1. Specifications

T_A = +25 °C, V_{CC} = 5 V, R_L = 10 kΩ, unless otherwise noted

Parameter	Symbol	Condition		Min.	Typ.	Max.	Unit
General Electrical Data							
Primary Nominal Current	I_{PN}	TMR7559-1000B		-	100	-	A
		TMR7559-1500B		-	150	-	
		TMR7559-2000B		-	200	-	
		TMR7559-2500B		-	250	-	
Primary Current Measuring Range	I_{PM}	TMR7559-1000B		-300	-	300	A
		TMR7559-1500B		-450	-	450	
		TMR7559-2000B		-500	-	500	
		TMR7559-2500B		-500	-	500	
Sensitivity	S	I_P = 0 to ±I_{PN}	TMR7559-1000B	-	6.25	-	mV/A
			TMR7559-1500B	-	4.167	-	
			TMR7559-2000B	-	3.125	-	
			TMR7559-2500B	-	2.7	-	
Supply Voltage	V_{CC}	±5 %		-	5	-	V
Reference Output Voltage	V_{REF}	-		2.485	2.5	2.515	V
Offset Voltage	V_{OFF}	-		-	2.5	-	V
Output Voltage	V_{OUT}	I_P = 0 to ±I_{PM}		-	V_{OFF} + S × I_P	-	V
Current Consumption	I_C	I_P = 0		-	16	-	mA
Static Performance Data							
Accuracy	X_G	I_P = 0 to ±I_{PN}		-	±0.8	-	% I_{PN}
		T_A = 85 °C, I_P = 0 to ±I_{PN}		-	±1.4	-	
		T_A = 105 °C, I_P = 0 to ±I_{PN}		-	±1.6	-	
Linearity Error	ε_L	I_P = 0 to ±I_{PN}		-	±0.15	-	% I_{PN}
Symmetry	ε_{SYM}	T_A = -40 °C to +105 °C, I_P = 0 to ±I_{PN}		99	100	101	%
Offset Error	V_{OE}	T_A = +25 °C, I_P = 0		-	-	5	mV
Dynamic Performance Data							
Response Time	t_R	di/dt > 50 A/μs, 10% to 90% of I_{PN}		-	1	-	μs
Bandwidth	BW	-3 dB		DC	300	-	kHz

2. Maximum Continuous DC Primary Current

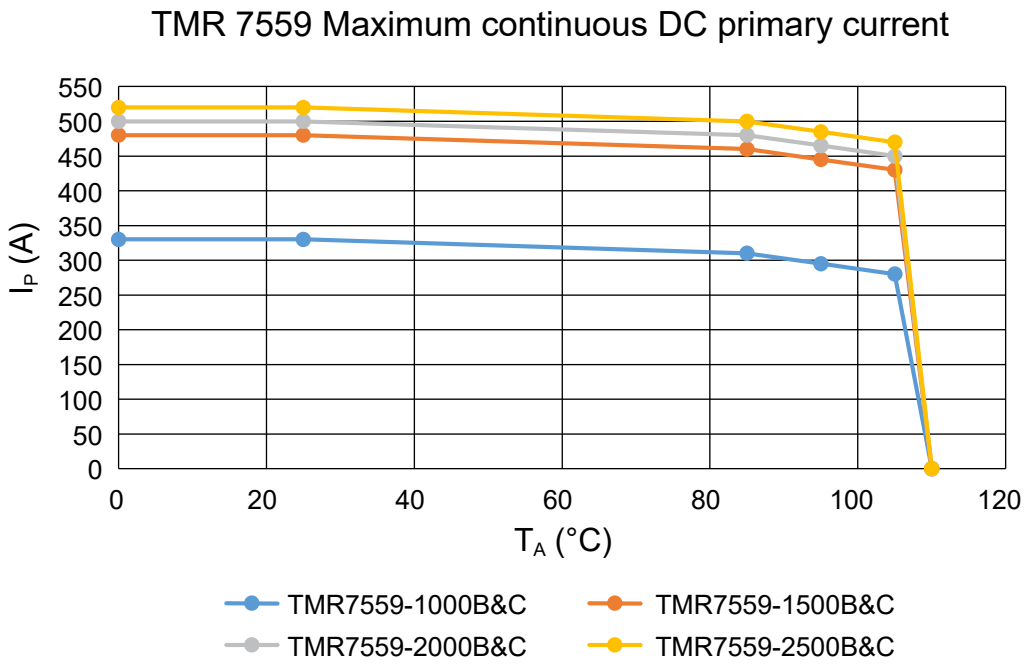


Figure 1. I_P vs T_A for TMR7559

The maximum continuous DC primary current plot shows the boundary of the area for which all the following conditions are true:

- $I_P < I_{PM}$
- Junction temperature $T_j < 125°C$
- Primary conductor temperature $T_A < 110°C$

3. Typical Output Characteristics

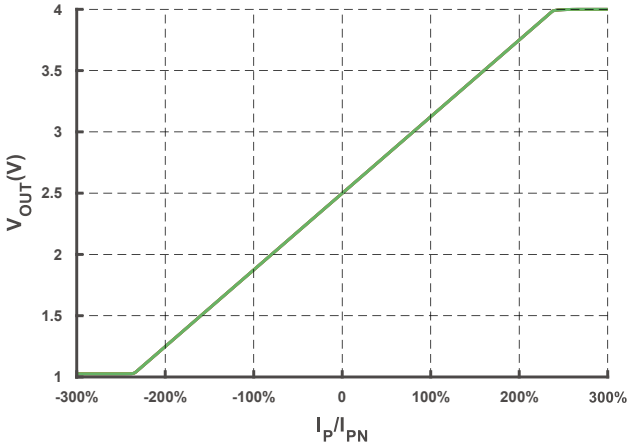


Figure 2. Output Voltage vs Primary Current

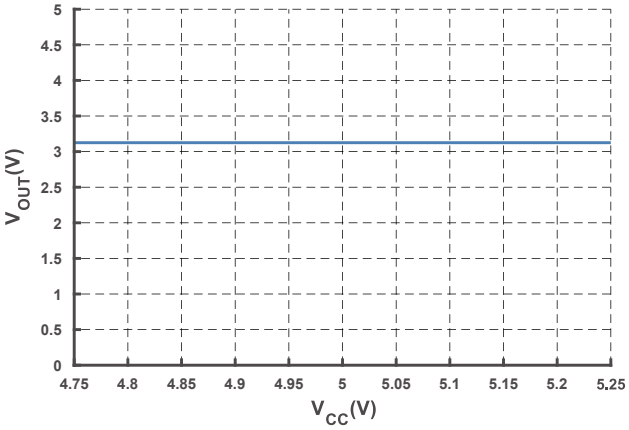


Figure 3. Output Voltage vs Supply Voltage (@I_P = I_{PN})

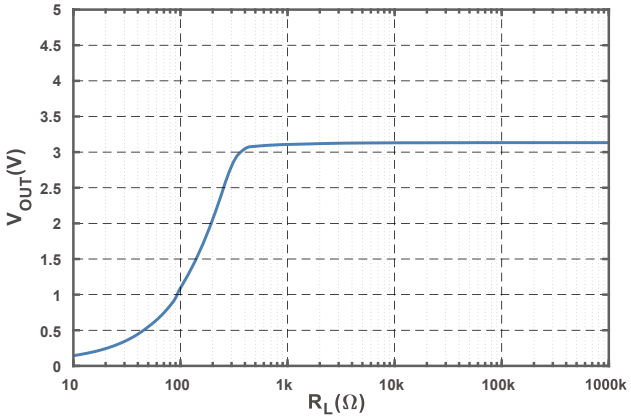


Figure 4. Output Voltage vs Load Resistance (@I_P = I_{PN})

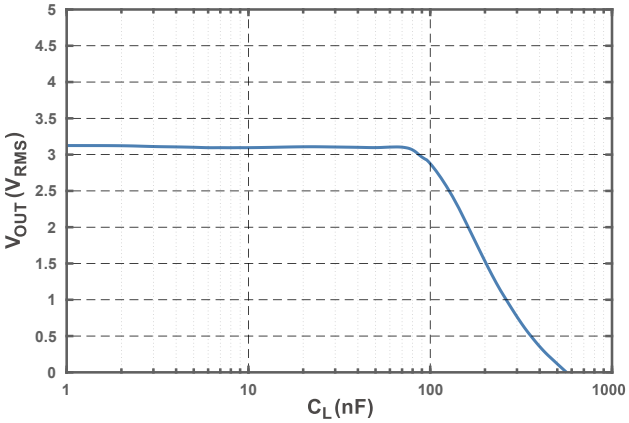


Figure 5. Output Voltage vs Load Capacitance (@I_P = I_{PN})

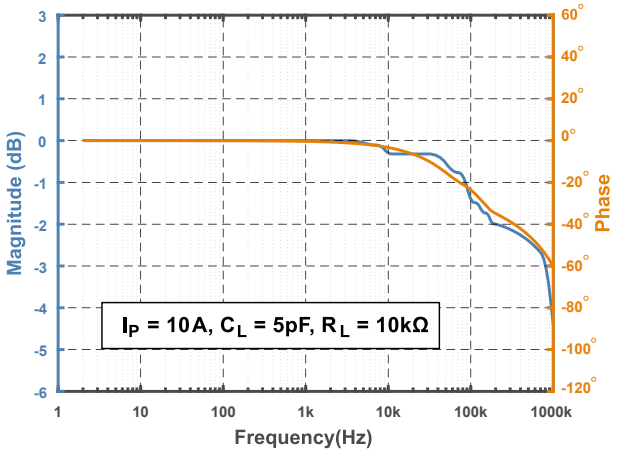


Figure 6. Bode Plot

4. Typical Temperature Characteristics



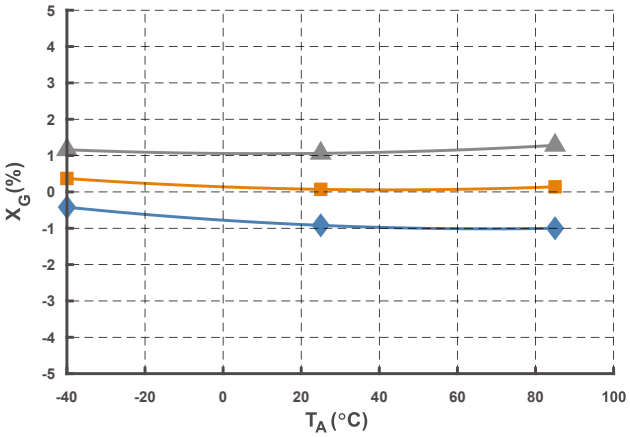


Figure 7. Accuracy

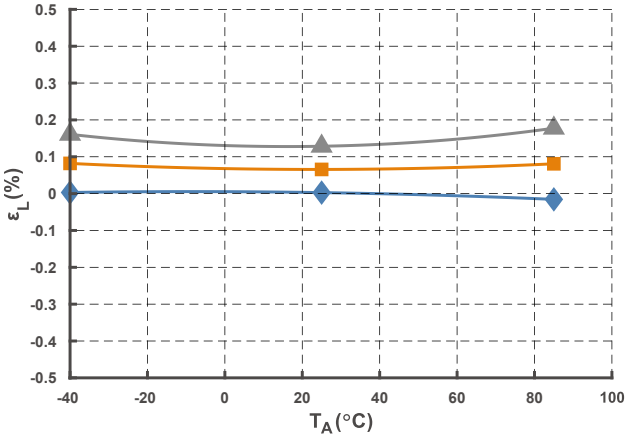


Figure 8. Linearity Error

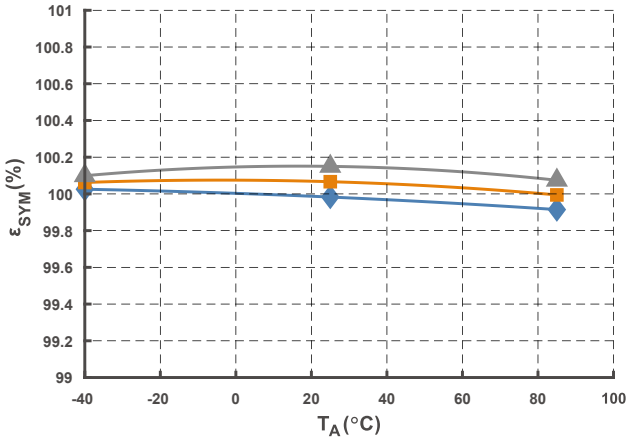


Figure 9. Symmetry

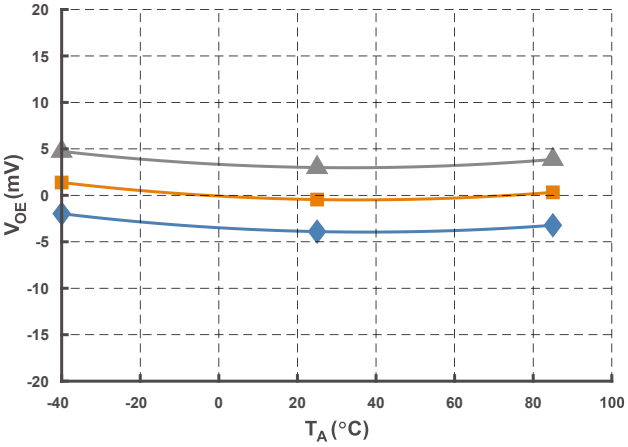


Figure 10. Offset Error

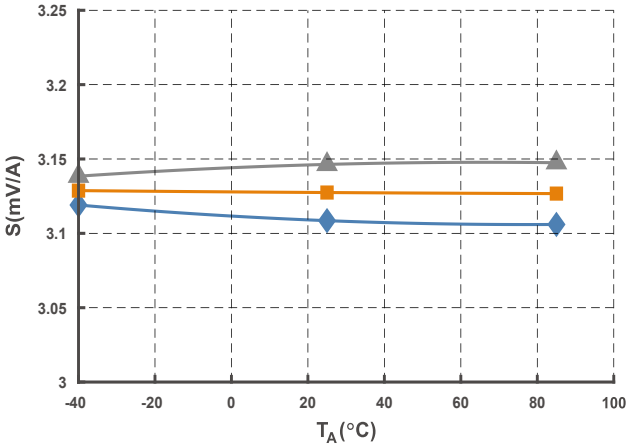


Figure 11. Sensitivity

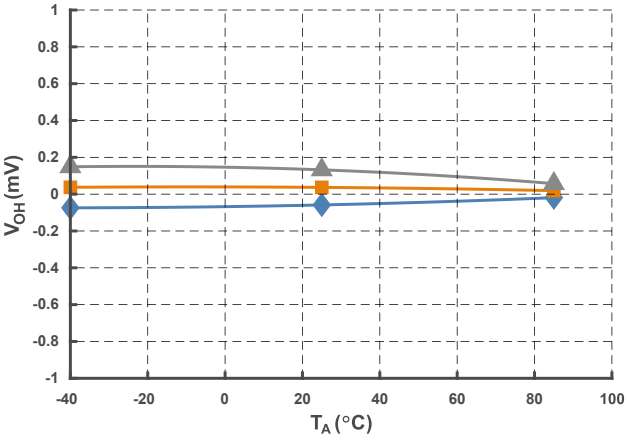


Figure 12. Hysteresis

5. Parameters Definition and Formula

1) Output Voltage

$$V_{OUT} = V_{OFF} + S \times I_P$$

V_{OUT} stands for current sensor output voltage at given primary current, V_{OFF} stands for offset voltage, S stands for sensitivity, I_P stands for primary current.

2) Accuracy

$$X_G = \underset{I_P \in [-I_{PN}, I_{PN}]}{MAX} \left(\frac{(V_{OUT} - V_{REF}) - (S \times I_P)}{S \times I_{PN}} \times 100\% \right)$$

I_{PN} stands for nominal primary current

3) Sensitivity

$$S = \frac{V_{OUT(@\ I_{PN})} - V_{OUT(@\ -I_{PN})}}{2 \times I_{PN}}$$

$V_{OUT(@\ I_{PN})}$ and $V_{OUT(@-I_{PN})}$ stand for the current output at I_{PN} and $-I_{PN}$ respectively.

4) Linearity

$$\varepsilon_L = \underset{I_P \in [-I_{PN}, I_{PN}]}{MAX} \left(\frac{(V_{OUT} - V_{REF}) - (\bar{V}_{OE} + \bar{S} \times I_P)}{S \times I_{PN}} \times 100\% \right)$$

$\bar{S}$ and $\bar{V}_{OE}$ stand for the average values of the sensitivity and electric offset.

5) Symmetry

$$\varepsilon_{SYM} = \left| \frac{V_{OUT(@\ I_{PN})} - \bar{V}_{OFF}}{V_{OUT(@\ -I_{PN})} - \bar{V}_{OFF}} \right| \times 100\%$$

6) Hysteresis

$$V_{OH} = MAX\ \Delta H$$

ΔH is the maximum residual output current between full scale positive and negative nominal current.

7) Offset Voltage

$$V_{OE} = V_{OUT(@\ I_P = 0)} - V_{REF}$$

6. Electrical Connection Diagram

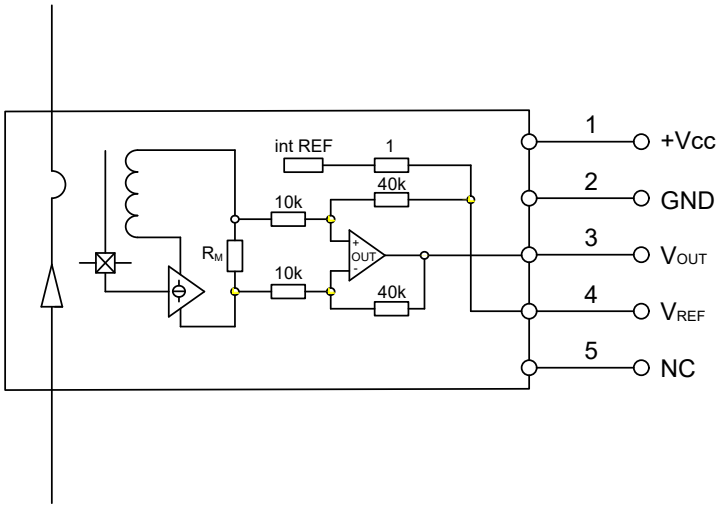


Figure 13. Electrical connection diagram

Remarks

1. V_{OUT} is positive when the primary current (I_P) is in the same direction as the arrow indication on the label and vice versa.
2. Improper connection may result in permanent damage of the sensor.
3. Excessive capacitive load may result in distortion of output signals when measuring high frequency primary signal. Please refer to Output Voltage vs Load Capacitance Curve.
4. Dynamic performances (di/dt and response time) are best with a single busbar completely filling the primary through hole.
5. Sensor is customizable upon request.

7. Dimensions

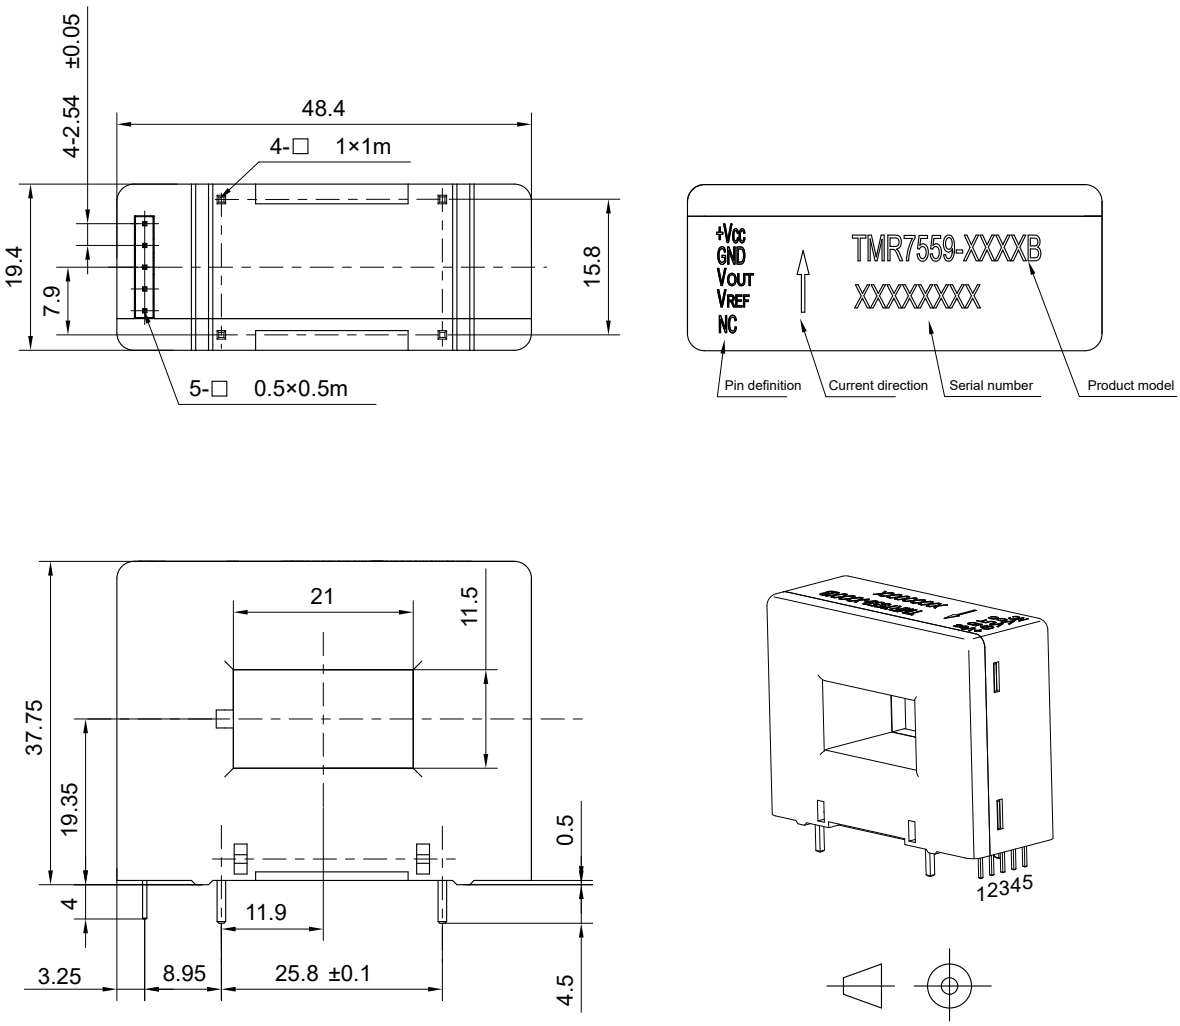


Figure 14. Dimension (unit: mm, tolerances for unmarked scales ±1 mm)

8. Recommended Pad Schematic Diagram

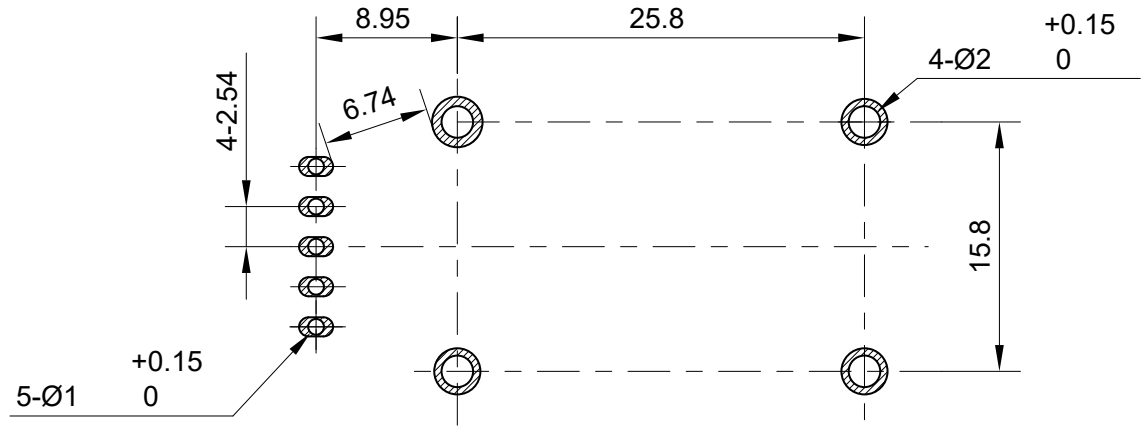


Figure 15. Recommended pad schematic diagram (unit: mm)

9. Typical Application Circuit

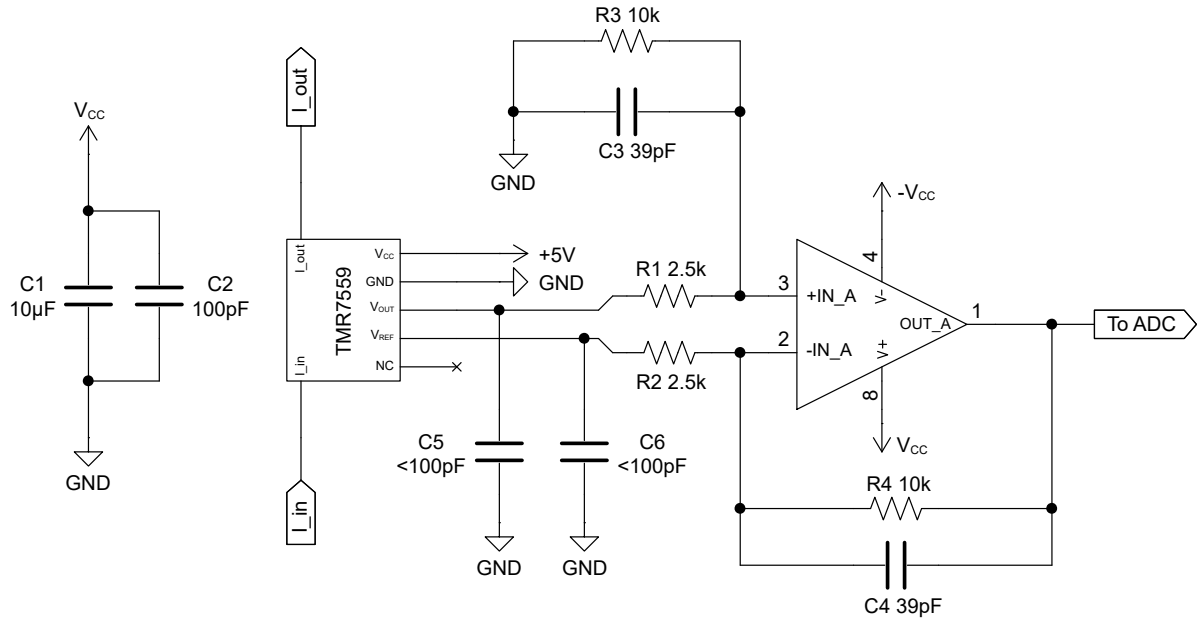


Figure 16. Typical application circuit

Typical application circuit of the TMR7559 series current sensor. The amplification factor is approximately K = R4 / R2, which requires satisfying R1 = R2 and R3 = R4. The amplification factor of the above circuit is about 4. The load capacitance of V_{OUT} and V_{REF} shall be less than 100 pF to avoid oscillation.

Copyright © 2026 by MultiDimension Technology Co., Ltd.

Information furnished herein by MultiDimension Technology Co., Ltd. (hereinafter MDT) is believed to be accurate and reliable. However, MDT disclaims any and all warranties and liabilities of any kind, with respect to any examples, hints or any performance or use of technical data as described herein and/or any information regarding the application of the product, including without limitation warranties of non-infringement of intellectual property rights of any third party. This document neither conveys nor implies any license under patent or other industrial or intellectual property rights. Customer or any third-party must further determine the suitability of the MDT products for its applications to avoid the applications default of customer or third-party. MDT accept no liability in this respect.

MDT does not assume any liabilities of any indirect, incidental, punitive, special or consequential damages (including without limitation of lost profits, lost savings, business interruption, costs related to the removal or replacement of any products or rework charges) whether or not such damages are based on tort (including negligence), warranty, breach of contract or any other legal theory. Notwithstanding any damages that customer might incur for any reason whatsoever, MDT's aggregate and cumulative liability towards customer for the products described herein shall be limited in accordance with the terms and conditions of commercial sale of MDT.

Absolute maximum ratings are the extreme limits the device will withstand without damage to the MDT product. However, the electrical and mechanical characteristics are not guaranteed as the maximum limits (above recommended operating conditions) are approached. MDT disclaims any and all warranties and liabilities of the MDT product will operate at absolute maximum ratings.

Specifications may change without notice.

Please download latest document from our official website www.dowaytech.com/en.

Recycling

The product(s) in this document need to be handed over to a qualified solid waste management services company for recycling in accordance with relevant regulations on waste classification after the end of the product(s) life.

MULTIDIMENSION
MultiDimension Technology Co., Ltd.
No.2 Guangdong Road, Zhangjiagang Free Trade Zone, Jiangsu, China
Web：www.dowaytech.com/en E-mail：info@dowaytech.com